

1. Check contents.
2. Take the 2.5m (28mm) top pole section with the cleat and joint at the bottom, and insert it into the bottom of the vertical sleeve. (Fig 1) Push it all the way up until it comes out the top of the sleeve. (Fig 2)
3. Join the two pieces of carbon fibre rod together. Feed the carbon fibre rod into the top of the sleeve on the curved edge, black tip end first. (Fig 3)
4. Push the other end of the carbon fibre rod into the yellow connector on the arm section. (Fig 4)
5. Push the carbon rod completely into the sleeve right down to the bottom, (Fig 5) this enables you to mount the arm T joint over the vertical 28mm pole section. (Fig 6)
6. Secure the T joint on the end of the pole by tightening the grub screws with the allen key provided. (Fig 7)
7. Insert the yellow button on the end of the rope into the cleat on the pole, slide down the pole to tension the flag and tighten the wingnut. (Fig 8)
8. Add the 2.5m (45mm) bottom section onto the joint of the top section. (Fig 9)
- 9 Drive the vehicle onto the wedge. (Allow maximum clearance to avoid damage to the vehicle) (Fig10)
10. Mount the pole onto onto the wedge ensuring the pole covers the full length of the spigot. (Make sure that the flag can rotate freely clear of obstacles). (Fig 11)

VIEW SHOWN IS FROM
THE REVERSE OF THE
FLAG




Fig 1.




Fig 2.




Fig 3.




Fig 4.




Fig 5.




Fig 6.




Fig 7.




Fig 8.




Fig 9.




Fig 10.





Fig 11.

[NEVER remove the vehicle from the 'Wedge' without first removing the pole]

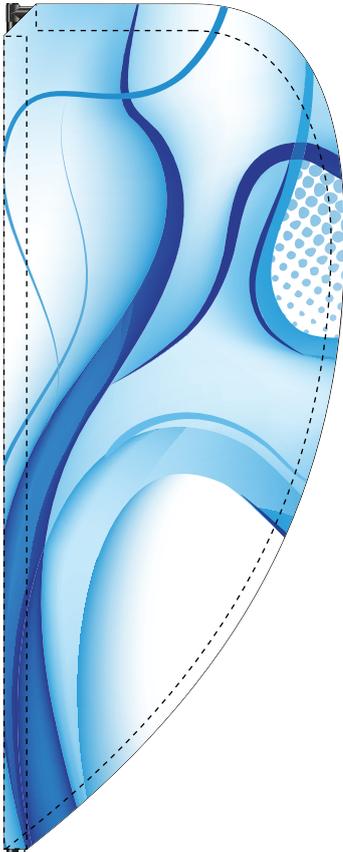

- 2.5m (40mm) Pole
- 2.5m (28mm) Pole
(with joint and cleat attached)
- 2 x Carbon Fibre Rods
- 0.5m Arm (T joint attached)
- 1 Allen Key

- D-Barrier Clamp Kit:
- Ground socket
- Clamps x 2
- Allen Key

CONTENTS

Vision Pole Specifications

Pole Height	5m
Length of bottom section	2.5m
Inside diameter of bottom section	40.39mm
Outside diameter of bottom section	44.45mm
Length of top section	2.5m
Inside diameter of top section	25mm
Outside diameter of top section	28mm
Arm length (not incl connector or T joint)	0.5m
Arm Outside diameter	28mm
Arm Inside diameter	25mm
Length of Carbon fibre rod with joiner	1.24m
Length of Carbon fibre rod with tip	1.515m
Total weight	3.2kg
Flag size	90cm x 225cm

Wedge Specifications

Length	405mm
Width	316mm
Overall Height	239mm
Height of Spigot	200mm
Internal Diameter of Spigot	28mm
External Diameter of Spigot	40mm
Weight	6kg



WARNINGS

Always remove the pole from the wedge before moving vehicle
 Do not fly flag when wind speed exceeds Force 7 (32mph)
 It remains the responsibility of the user to establish the suitability
 of the product /s for the use/s to which they are put