

# Forecourt Pole

with Rotating Arm  
and Wall Socket

## ASSEMBLY INSTRUCTIONS

October 2018 v3

**PRIOR TO INSTALLING WALL MOUNTED FLAGSTAFFS, WE RECOMMEND THAT YOU SEEK ADVICE REGARDING THE SUITABILITY OF THE WALL AND THE BEST TYPE OF FIXINGS FROM A PROFESSIONAL SOURCE**

1. Check contents. Position bottom bracket ensuring that it is vertical, drill holes and bolt to the wall (see Fig 1).
2. Centralise the top bracket vertically above the bottom bracket with the specified distance between the holes as shown the chart on page 2. Drill and fix into position (see Fig 2).
3. Place the ground socket into the brackets, ensuring it sits in the bottom of the bottom bracket properly and level with the TOP EDGE of the top bracket (see Fig 3).
4. Place weight over the pole (see Fig 4a), mount the rotating joint onto the top of the pole (see Fig 4b), push on the finial. (see Fig 4c)
5. Push rotating arm into joint, ensure button clips into place (see Fig 5a), slide top sleeve on flag over the arm. (see Fig 5b)
6. Secure plastic ties through the eyelets and around the pole. DO NOT OVER-TIGHTEN (see Fig 6a). At the bottom of the flag attach the D-ring to the metal clip on the weight. (see Fig 6b)
7. Mount the pole into the ground socket (see Fig 7).



Fig 1.




Fig 2.




Fig 3.




Fig 4a.




Fig 4b.




Fig 4c.




Fig 5a.




Fig 5b.




Fig 6a.




Fig 6b.

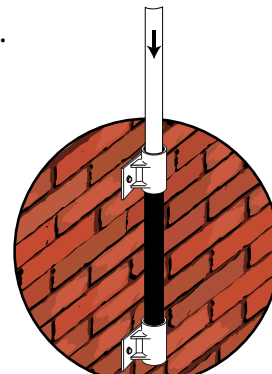


Fig 7.

# ForecourtPole

with Rotating Arm  
and Wall Socket

## ASSEMBLY INSTRUCTIONS

October 2018 v3

Arm Unit

Main Ali Pole  
1m Rotating Arm and ties  
Rotating Joint & Finial  
Weight

Top Bracket  
Bottom Bracket  
Ground Socket


**BOLTS NOT INCLUDED**

CONTENTS


## Forecourt Pole Specifications

Pole Size	4m	5m
Height above ground	3.5m	4.5m
Length of main Ali section	4m	4m
Inside diameter of main Ali section	40.39mm	40.39mm
Outside diameter of main Ali section	44.45mm	44.45mm
Wall thickness	2mm	2mm
Weight internal diameter	61mm	61mm
Arm length	1m	1m
Arm Outside diameter	20.4mm	20.4mm
Arm Inside diameter	17.96mm	17.96mm
Packed Weight	4kg	5kg
Ground socket internal diameter	46.5mm	46.5mm
Ground socket external diameter	53.5mm	53.5mm
Length of ground socket	600mm	600mm
Weight	300g	300g
Bracket plate size	200mm x 100mm	200mm x 100mm
Bracket internal diameter	55mm	55mm
Bolt hole diameter	14mm	14mm
Distance between top and bottom bracket (centre of hole to hole)	520mm	520mm
Total weight of kit	4.43kg	4.43kg
Max flag size (portrait)	100cm x 250cm	100cm x 250cm
Max flag size (landscape)	180cm x 120cm	180cm x 120cm

Main Ali Section

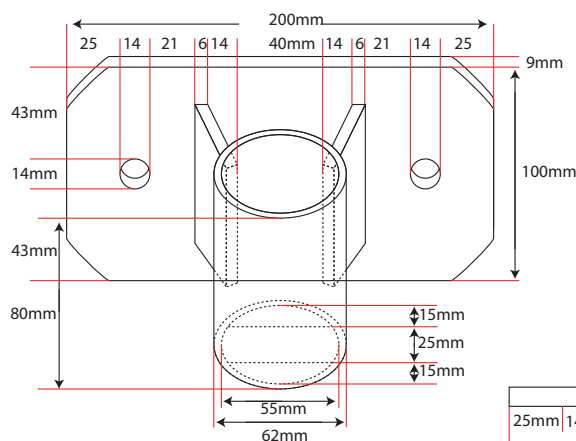

**PRIOR TO INSTALLING WALL MOUNTED FLAGSTAFFS, WE RECOMMEND THAT YOU SEEK ADVICE REGARDING THE SUITABILITY OF THE WALL AND THE BEST TYPE OF FIXINGS FROM A PROFESSIONAL SOURCE**

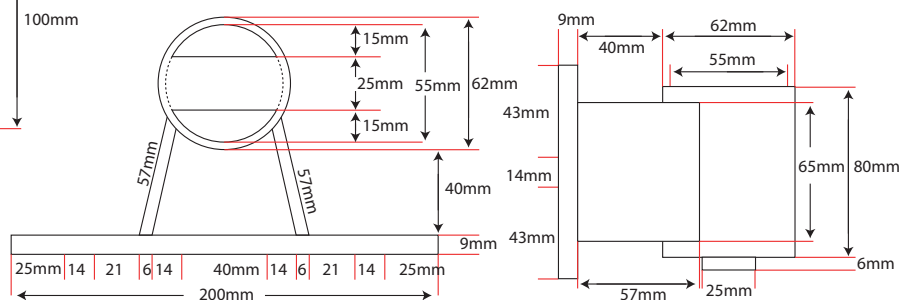

## WARNINGS

Re-Usable Ties must never be over tightened

Do not fly flag when wind speed exceeds Force 7 (32mph)

It remains the responsibility of the user to establish the suitability of the product /s for the use/s to which they are put