

# Forecourt Pole

4m  
With Event Waterbase

## ASSEMBLY INSTRUCTIONS

September 2019 v1

1. Check contents. Place weight over pole (see fig 1a), mount rotating joint onto top of pole (see fig 1b), push on finial. (see fig 1c)
2. Push rotating arm into joint, ensure button clips into place (see fig 2a), slide top sleeve on flag over the arm. (see fig 2b)
3. Secure plastic ties through the eyelets and around the pole. DO NOT OVER-TIGHTEN (see fig 3a). At the bottom of the flag attach the D-ring to the metal clip on the weight. (see fig 3b)
4. Fill the waterbases with water, making sure that the screw cap is secure. (see fig 4)
5. Position the bases on top of each other lining up the handles. Thread the blue strapping through the handles and back through the metal clip making sure the strap is not twisted. (see fig 5)
6. Pull the strapping tight and close the clip ensuring that it sits inside the gap on the handles. Tuck the excess strap into the handle recess or trim off. (see fig 6)
7. Place the cover over the bases, ensure that the hole in the top is positioned over the hole in the bases and that the elastic around the bottom of the cover is tucked under the bottom base. (see fig 7)
8. Insert the spigot into the top hole and through all the bases until it hits the ground, place the ptfе rings over the spigot. (see fig 8)
9. Mount the pole onto the bases ensuring the pole covers the full length of the spigot (Make sure the arm and flag can rotate freely clear of obstacles). (see fig 9)

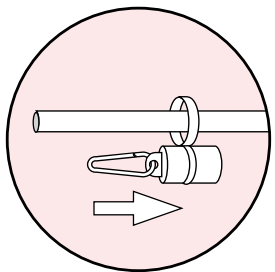


Fig 1a.

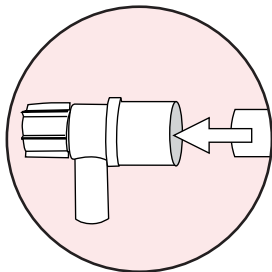


Fig 1b.

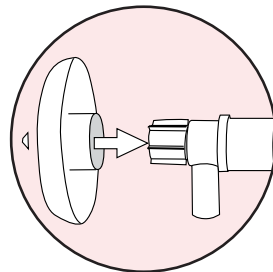


Fig 1c.

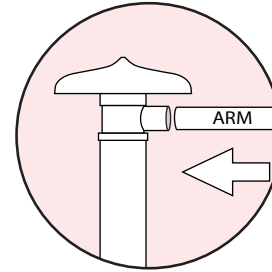


Fig 2a.

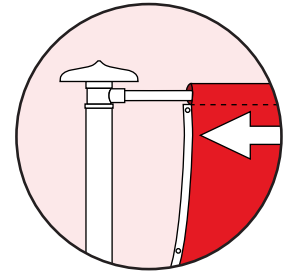


Fig 2b.

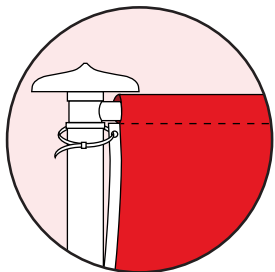


Fig 3a

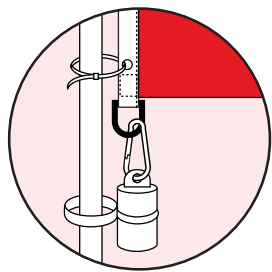


Fig 3b.

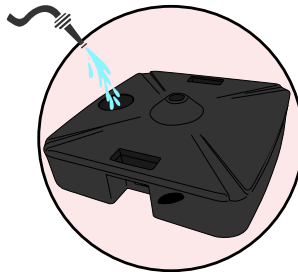


Fig 4.

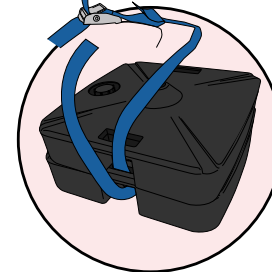


Fig 5.

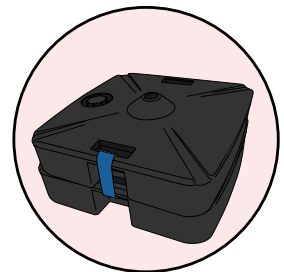


Fig 6.

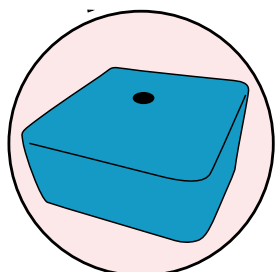


Fig 7.

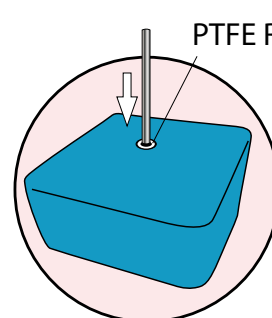


Fig 8.

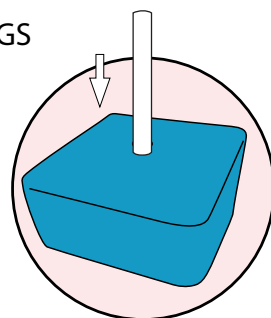



Fig 9.

# Forecourt Pole

ASSEMBLY INSTRUCTIONS

September 2019 v1

Arm Unit

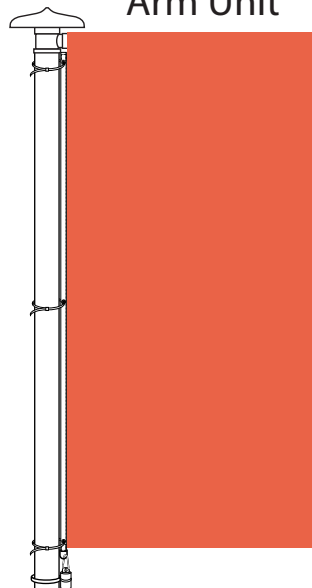

Main Ali Section

Main Ali Pole	Spigot x 1
1m Rotating Arm and ties	Bases (As per order)
Rotating Joint & Finial	Cover (Optional extra)
Weight	
PTFE Rings x 2	
Straps x 2	

CONTENTS

## Forecourt Pole Specifications

Pole Size	<b>4m</b>
Length of main Aluminium section	4m
Inside diameter of main Aluminium section	40.39mm
Outside diameter of main Ali section	44.45mm
Wall thickness	2mm
Weight internal diameter	61mm
Arm length	1m
Arm Outside diameter	20.4mm
Arm Inside diameter	17.96mm
Packed weight	4kg
Max flag size (portrait)	100cm x 250cm
Max flag size (landscape)	180cm x 120cm

## Waterbase Specifications

Length	600mm
Width	600mm
Overall Height	130mm
Waterbase Weight (empty)	4kg
Waterbase Weight (full)	40kg
Length of spigot	1000mm
External Diameter of spigot	40mm
Weight	1kg

## WARNINGS

**Ensure the bases are full of water and strapped securely together before erecting pole.**

**Re-Usable Ties must never be over tightened**

**Do not fly flag when wind speed exceeds Force 7 (32mph)**

**It remains the responsibility of the user to establish the suitability of the product /s for the use/s to which they are put**

