

PRIOR TO INSTALLING WALL MOUNTED FLAGSTAFFS, WE RECOMMEND THAT YOU SEEK ADVICE REGARDING THE SUITABILITY OF THE WALL AND THE BEST TYPE OF FIXINGS FROM A PROFESSIONAL SOURCE

1. Check the contents. Drill suitable holes to fix the butt cup and mast band. The distance apart should be as per the chart on page 2.
2. Mount the butt cup and band onto the wall and secure. (See Fig 1)
3. Release the outer portion of the mast band to allow the flagstaff to be installed. (See Fig 2)
4. Thread the halyard through the finial. Push the finial onto the top of the pole. (See Fig 3)
THE FLAGSTAFF NEEDS TO BE DOWN TO DO THIS, KEEP THE FINIAL RAISED OFF THE GROUND TO AVOID DAMAGING IT.
5. Place the base of the flagstaff into the bottom butt cup, (See Fig 4) and position into the mast band.
IT IS RECOMMENDED THAT AT LEAST TWO PEOPLE ARE INVOLVED IN THIS OPERATION.
6. Whilst supporting the flagstaff, re-attach the out portion of the mast band. (See Fig 5)
Tighten the bolts, checking that the pole is vertical.
7. Attach the cleat to the pole in the pre drilled position using the screws provided. (See Fig 6)
8. Ensure flag is the correct way up, tie an end of the halyard to each of the D-rings on the flag. (See Fig 7)
9. Hoist the flag to the top of the pole, wrap the halyard around the pole once and then wrap it around the cleat. If the flag has eyelets and an s-clip, hook the s-clip to the halyard to keep the flag close to the pole. (See Fig 8)




Fig 1,




Fig 2,




Fig 3,




Fig 4,




Fig 5,

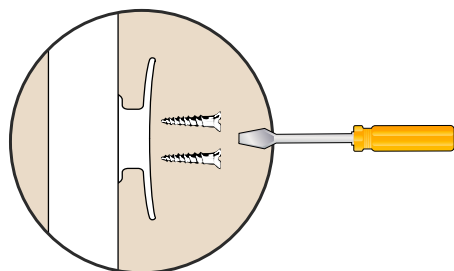


Fig 6,




Fig 7,





Fig 8,

Glassfibre Flagstaffs

Wall brackets
Butt Cup & Mast Band
(External Halyard)

ASSEMBLY INSTRUCTIONS

October 2016 v3

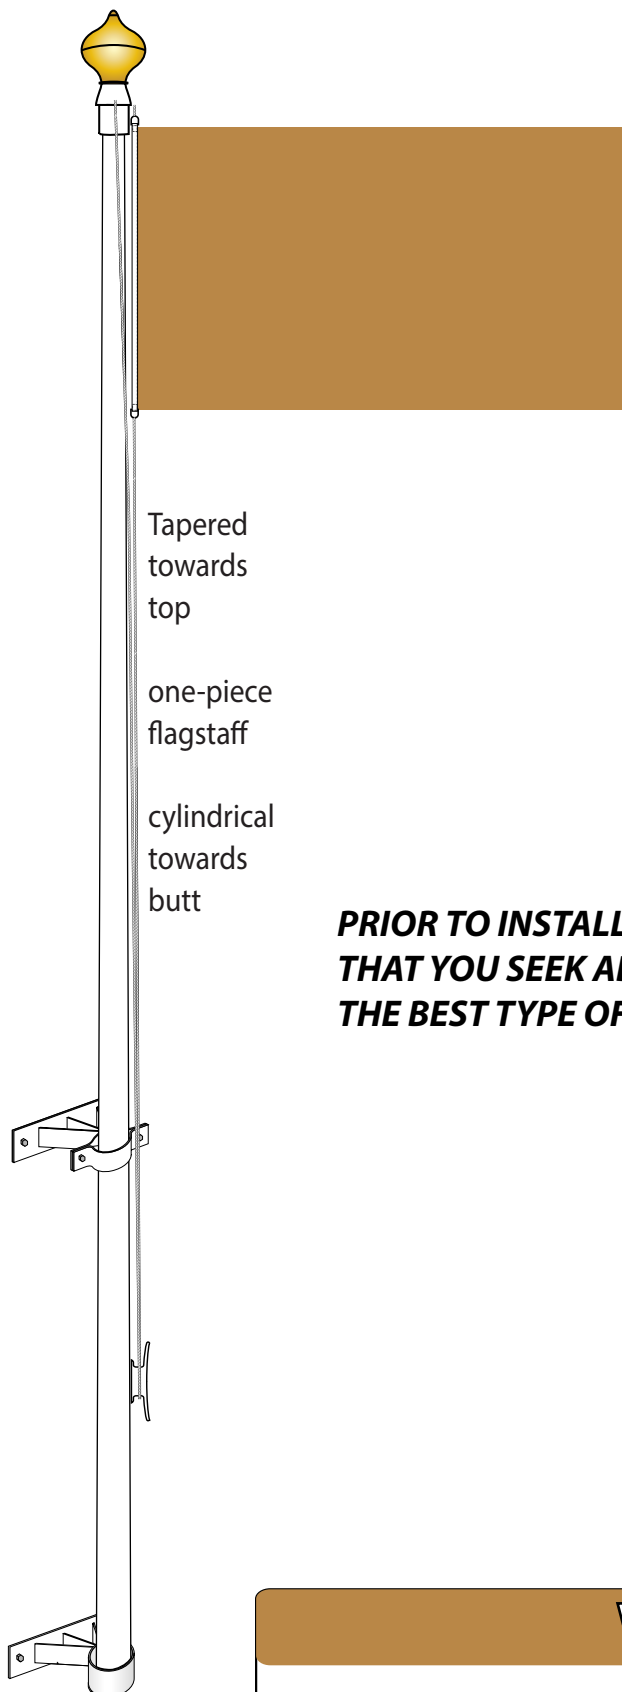

1 Glassfibre Flagstaff
1 Cup Band
1 Mast band
1 Onion Finial
1 Cone


1 Halyard
1 Cleat
2 Screws for cleat

CONTENTS

Glassfibre Flagstaff Specifications

Flagstaff Height - A	6m	8m
Butt Diameter	115mm	115mm
Top Diameter	65mm	65mm
Weight	14kg	16kg
Mast Band Weight	5kg	5kg
Butt Cup Weight	5kg	5kg
Distance between the butt cup and mast band	200cm	270cm
Maximum Flag Size	2m	2.5m

PRIOR TO INSTALLING WALL MOUNTED FLAGSTAFFS, WE RECOMMEND THAT YOU SEEK ADVICE REGARDING THE SUITABILITY OF THE WALL AND THE BEST TYPE OF FIXINGS FROM A PROFESSIONAL SOURCE

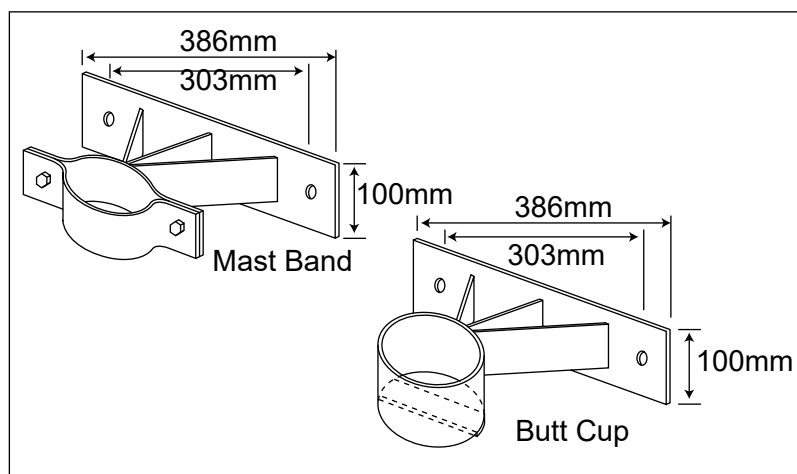

WARNINGS

Do not fly flag when wind speed exceeds Force 7 (32mph)

It remains the responsibility of the user to establish the suitability of the product /s for the use/s to which they are put